
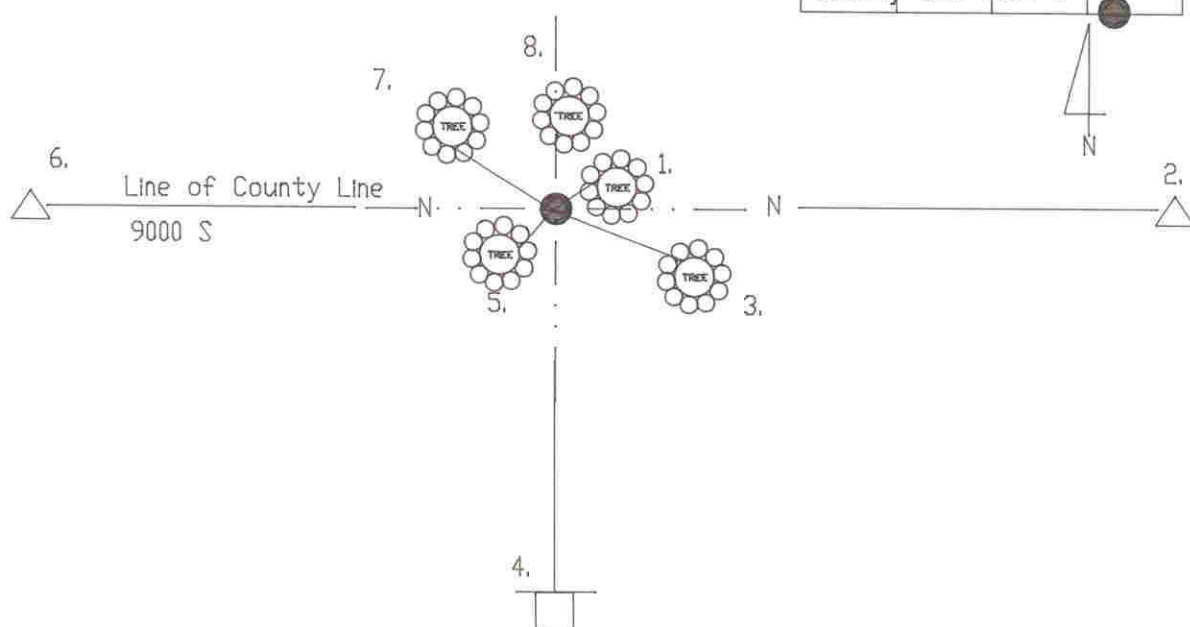


OFFICE OF THE MARION COUNTY SURVEYOR
 SECTION RECORD CORNER
 SECTION 19 TOWNSHIP 14 RANGE 3
 DATE: 6-5-96
 PARTY CHIEF: Wilcoxon
 CREW: _____
 TYPE OF MARKER: Witness Harrison
 METHOD OF ESTABLISHMENT: County: 9-23-88
 _____ Chain

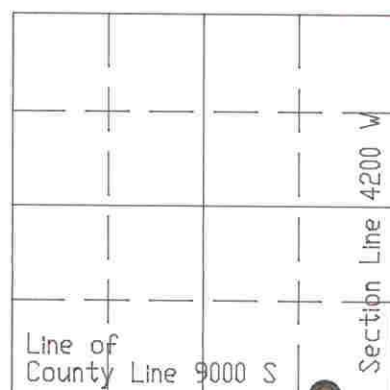

Set on section line as witness to SE 19-14-3 and S Q 19-14-3, since both of said corners fall in water. SE 19-14-3 was computed using single porportionate measurement (based on original gov't distances) between SW 19-14-3 (stone) and S Q 20-14-3. A comparison check was made to said SE by extending W line NW Q 20-14-3 south. SE 19-14-3 was only 0.3' off said southerly extention. S Q 19-14-3 was computed using single porportionate measurement (based on original gov't distances) between SE & SW of 19-14-3. See Marion County Surveyor Job#820081, REPORT OF SURVEY.

PX4319A

REF.	DISTANCE	DESCRIPTION
1.	8.10'	Boat spike w/MCS washer NW of tree
2.	938.87'	Due E to SE 19-14-3 (falls in water)
3.	23.25'	Boat spike w/MCS washer N 24' sycamore tree 40'up
4.	100'+/-	Due S to sign post (edge of field)
5.	5.82'	PK w/shiner E 4' buckeye 36'up
6.	1725.39'	Due W to S Q 19-14-3 (falls in water)
7.	10.90'	Boat spike w/MCS washer S 8' buckeye 36'up
8.	13.75'	Boat spike w/MCS washer W 18' buckeye 60'up